

ADR403 Customized Version



-2013

1.	3
2.	3
3.	, :	3
4.	3
5.	4
6.	4
7.	5

1.

ADR403/ADR403

2.

- 1 255
- 24 80
- 0,3 7 *
- USB-
- A B - 5 TTL (ADR403C)
- 2 : 12
- 24
- : 0-70

3.

:

80 DC


7 .

4.

- **POWER GROUND -**
- **+24 TO 80 VDC -**
- **PHASE A - A**
- **PHASE B - B**
- **PHASE C - C**
- **PHASE D - D**
- **KEY - Home**
- **A ENC -**
- **B ENC -**
- **HOME - Home**
- **COM - + 12**
- **- ENC - <<->**
- **+ ENC - <<+>**
- **+5VDC - +5VDC**

- -5VDC - -5VDC

5.

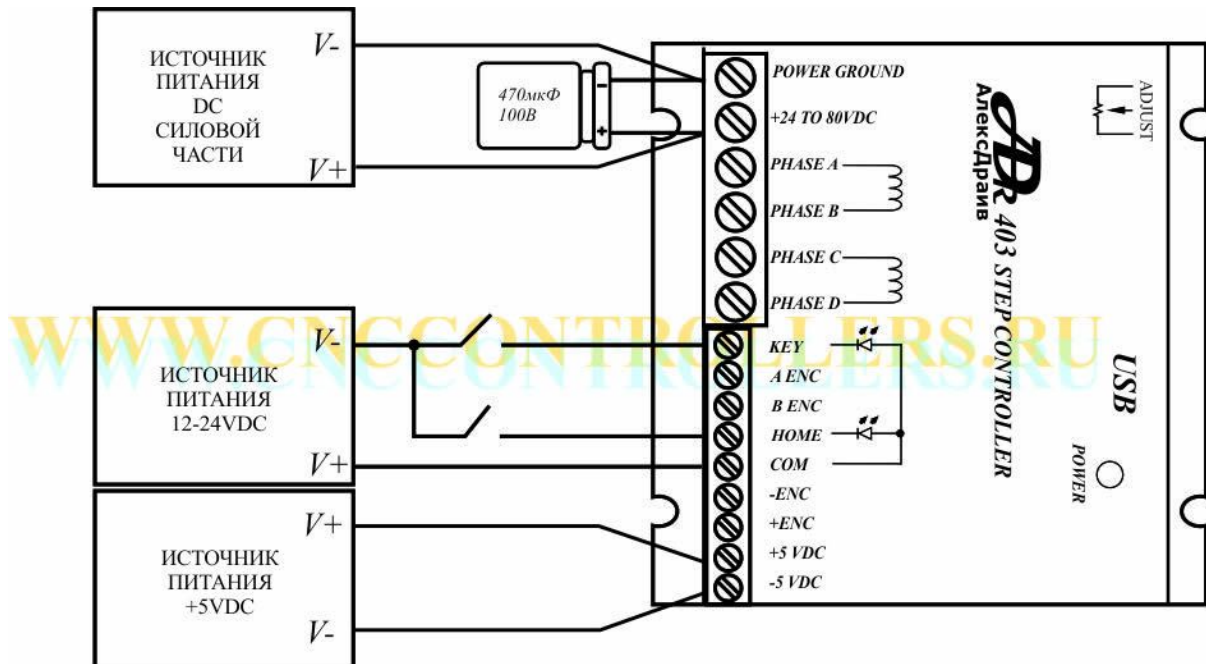

6.

1. USB-
2. « ».
3. Com- Com- , ADR403,
4. open port. Ratio
5. 1 255 Ratio
DirSideUp DirSideDown
6. Home ()
SpeedHome 1 255 ,
7. SpeedHome, Load

7.

